



Perfecting the Air  
Kenyamanan Tanpa Batas

- Ask a qualified installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Use only those parts and accessories supplied or specified by Daikin. Ask a qualified installer or contractor to install those parts and accessories. Use of unauthorised parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Read the user's manual carefully before using this product. The user's manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.

If you have enquiries, please contact your local importer, distributor and/or retailer.

AUTHORIZED DEALER

**Cautions on product corrosion**

1. Air conditioners should not be installed in areas where corrosive gases, such as acid gas or alkaline gas, are produced.
2. If the outdoor unit is to be installed close to the sea shore, direct exposure to the sea breeze should be avoided. If you need to install the outdoor unit close to the sea shore, contact your local distributor.

Specifications, designs and other content appearing in this brochure are current as of November 2025 but subject to change without notice.

**DCC 0800 1 081 081**  
DAIKIN CONTACT CENTER

**Jam Beroperasi:**

Senin - Jumat: 07:00 - 19:00 WIB  
Sabtu - Minggu & Libur Nasional: 07:00 - 17:00 WIB

**PT DAIKIN AIRCONDITIONING INDONESIA**

Menara Astra 7th & 8th Floor, Jl. Jenderal Sudirman Kav. 5-6,  
Kel. Karet Tengsin, Kec. Tanah Abang, Jakarta Pusat, DKI Jakarta - 10220  
Telp : +6221 8665 6886 | Website : www.daijin.co.id

• **SERVICE CENTER** : Jakarta Selatan, Telp. : 021-2782 5545 | Samarinda, Telp. : 0541-252 2889 • **WORKSHOP**: Cirebon, Telp.: 0231-8817 512 | Banjarmasin, Tlp. : 0511-3258 969 | Aceh, Tlp. : 0651-7318 036 | Lombok, Tlp. : 0370-7843 231 | Jambi, Tlp. : 0741-3066 790 | Padang, Tlp. : 0751-896 2684 • **TRAINING CENTER** : Sunter, Telp. : 021-650 5030 • **BRANCH** : Bekasi, Telp. :021-2945 0585 | Tangerang, Telp. : 021-5314 1195 | Bandung, Telp. : 022-522 5150 | Semarang, Telp. : 024-7660 3221 | Yogyakarta, Telp. : 0274-551 321 | Surabaya, Telp. : 031-503 1138 | Denpasar, Telp. : 0361-900 5514 | Makassar, Telp. : 0411-805 2691 | Palembang, Telp. : 0711-573 2282 | Pekanbaru, Telp. : 0761-561 139 | Medan, Telp. : 061-4200 8866 | Manado, Telp. : 0431-719 1199 | Batam, Tlp. : 0778-4171 445



**SkyAir**

AIR CONDITIONING SYSTEM  
COOLING ONLY [50Hz]



# R32

The Next-Generation Refrigerant

Non Inverter SkyAir Series

Ceiling Cassette | Floor Standing  
Ceiling Concealed Medium Static Pressure Type  
Condensing Unit



# R32

## Pentagon of Benefits

### Ozone layer protection

1. R32 does not deplete the ozone layer unlike R22.
2. It is 1/3 lower in global warming potential comparing with R410A.

### Economic feasibility

1. R32 refrigerant is now available in high volume globally since it is 50% of R410A composition.
2. R32 has 9 % lower liquid density compared to R410A. In a same system, R32 charge is lesser than R410A.

### Safety

R32 refrigerant is a stable refrigerant. The amount of refrigerant charge deposited into the unit is insufficient to cause ignition.

### LCCP

1. Life Cycle Climate Performance (LCCP) is an indicator to evaluate the total global warming impact of refrigerants.
2. Factors included in LCCP are emission during:
  - refrigerant manufacturing.
  - air conditioner manufacturing.
  - air conditioner operating, servicing, and disposal.
3. LCCP of R32 refrigerant is the lowest, which promotes itself as a better substitution for future refrigerant.

### Energy efficiency

1. Several factors that contribute to better efficiency of R32 system are:
  - R32 refrigerant has lower vapour density and lower system mass flow rate. Thus, about 50% lower pressure drop can be expected.
  - R32 refrigerant has 43-50% higher latent heat compared to R410A.
  - R32 refrigerant has 41% higher liquid thermal conductivity compared to R410A, which permits better heat transfer at the same mass flux.



# Product Line-up

| Class   | 50  | 60   | 71  | 85   | 100  | 125   | 140  |
|---|---|--|---|--|--|---|--|
| <b>Ceiling Cassette 8-Way Flow</b><br><br>Indoor Unit<br>Panel (Wireless Handset)                     | <br>FCC50AV14<br>BC50F4                          | <br>FCC60AV14<br>BC50F4              |   | <br>FCC85AV14<br>BC50F4   | <br>FCC100AV14<br>BC50F4              | <br>FCC125AV14<br>BC50F4                           | <br>FCC140AV14<br>BC50F4              |
| <b>Ceiling Cassette 4-Way Flow</b><br><br>Indoor Unit<br>Panel (Wireless Handset)                     | <br>FCE50AV14<br>BC50FA4                         |  | <br>FCE71AV14<br>BC50FA4             |  |  | <br>FCE125AV14<br>BC50FA4                          |  |
| <b>Ceiling Concealed Medium Static Pressure Type</b><br><br>Indoor Unit<br>(Wired Handset)            | <br>FDMC50AV14                                  | <br>FDMC60AV14                      |   | <br>FDMC85AV14   | <br>FDMC100AV14                      | <br>FDMC125AV14                                   | <br>FDMC140AV14                      |
| <b>Floor Standing</b><br><br>Indoor Unit<br>(Wireless Handset)  |   |  |   | <br>FVC85AV14   | <br>FVC100AV14                      | <br>FVC125AV14                                   | <br>FVC140AV14                      |
| <b>Condensing Unit</b><br><br>Outdoor Unit (FCC, FDMC, FVC)<br>Outdoor Unit (FCE)<br><br>Power supply | <br>RC50AV14<br>RE50AV14<br>220-240/1/50 (POD) | <br>RC60AV14<br>200-240/1/50 (POD) | <br>RE71AV14<br>200-240/1/50 (POD) | <br>RC85AV14/RC85AY14<br>220-240/1/50 (POD)<br>380-415/3/50 (POD) | <br>RC100AY14<br>380-415/3/50 (POD) | <br>RC125AY14<br>RE125AY14<br>380-415/3/50 (POD) | <br>RC140AY14<br>380-415/3/50 (POD) |

**Remark :**  
POD : Power from Outdoor

# The Daikin R32 Next-Generation Refrigerant

## Cassette 3x3 8-Way Flow (FCC)



### High Performance

R32 refrigerant properties boost the capacity of units for selected model to achieve full tonnage.

| Size | Capacity (Btu/hr) |                            |
|------|-------------------|----------------------------|
|      | R410A             | R32                        |
| 50   | 18,500            | 18,500                     |
| 60   | 23,000            | <b>24,000</b> ↑ (Full 2TR) |
| 85   | 30,000            | 30,000                     |
| 100  | 36,000            | 36,000                     |
| 125  | 42,000            | 42,000                     |
| 140  | 46,000            | <b>48,000</b> ↑ (Full 4TR) |



### High Air Flow

High air flow ensures the spaces of the room to be cooled down rapidly to the set temperature.



### Energy Saving

R32 refrigerant properties provide better heat transfer compared to R410A refrigerant. Therefore, the efficiency is tremendously improved by 12%. Average EER increases as shown.



### Slim Unit Design

Low height of 246mm designed to fit into tight ceiling as well as saving space.

### Quiet Mode (Energy Saving)

Once activated, Quiet mode ensures a comfortable environment for restful sleep. Create extra saving for commercial application especially for low activity during night operation.

### ON / OFF Timer

Operation starts when the pre-set time of the ON timer elapses and stops when the pre-set time of the OFF timer elapses. This setting can be set from wireless LCD remote controller or wired LCD remote controller. Based on real time clock.

### Indoor Unit ON/OFF Switch

Enables to operate the unit even if the remote controller is misplaced or the remote's battery is weak. Pre-set at 24°C cool mode, just press the ON/OFF switch for instant cooling comfort.



### 8 - Way Air Flow Discharge

The unit delivers even and comfortable air-conditioning to all areas, covering to every corner of the room by combining 8-ways air discharge. Air flow direction can be fixed at your designated angle by the remote controller with auto swing mode.

### Stronger Air Draft

Motors are designed to boost higher airflow.



### Unified Square Panels

Panel size is the same for all models. It is easy to maintain a neat appearance when multiple units are installed in the same room.



### Optimal Comfort and Convenience Assured by Air Discharge Modes


To increase the comfort level of the air conditioned area, the system is built-in with 3 different types of air flow pattern to suit different requirements. Note: The default setting for air swing pattern is 1. The air swing pattern can be selected through the wireless remote control.

# Easy Installation and Serviceability




## Lightweight

All models can be installed without using a lifter.



## Easy Height Adjustment

Each corner of the unit has an adjuster pocket that allows you to easily adjust the unit's suspended height.

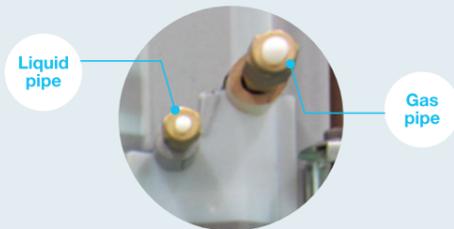

## Position of Connecting Pipe and Drain Hose

In order to create more space for installer to work on connection pipe of indoor unit, the connection pipe of gas and liquid are located further from each other and purposely not aligned to hanging hook. To enhance the convenience of installation by relocating drain hose location to another side of cassette unit (not same side with connection pipe).



## Easy Access to Control Box Location

The control box is now located in a more convenient and accessible space. Without adjusting the panel, control box can be directly accessed from the intake grille. Extra time saving on installation or servicing.




## Easy Hanging

Washer fixing plates secure washers in place and prevent washers from falling for easy installation.



## Easy Removal of Corner Cover

It is possible to easily remove without use of screws or tools.

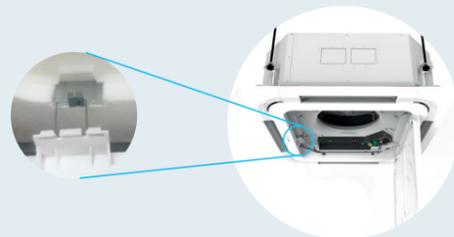

## Panel Hook Mechanism

This feature enables the installer to work with both hands as the panel can be hung on the unit.



## Condition of the Drain Pan and Drain Water


Can be checked by removing the suction grille and drain plug.



## Flexible Drain Hose

(Supplied together with cassette indoor unit)

Flexible drain hose of 200mm is provided as standard. Ensure the height of drain pipe from ceiling is  $\leq 700\text{mm}$  to prevent water leak.

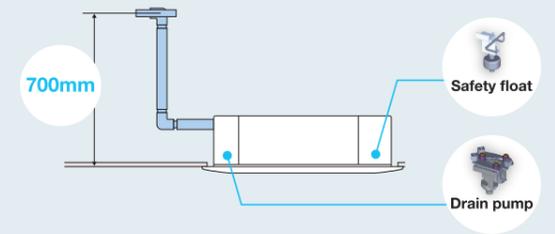

## Drain Pump is Equipped as Standard

The unit comes with high head drain pump of 700mm\* pressure head as standard. Drainage Protection: Safety Float incorporated in drain pump. Its function is to monitor water level and trigger drain pump to cut in when drainage water reached certain level.

\*700mm calculated from drain pipe outlet to highest elevation point

# Cleanliness



## Saranet Filters

Functions as standard dust filtration with 55% efficiency. Supplied as standard with Cassette 3x3 panel.



## Non-Flocking Flaps

Flaps can be detached without the use of tools. Condensation does not easily form and dirt does not cling to non-flocking flaps. They are easy to clean.

# The Daikin R32 Next-Generation Refrigerant

## Cassette 3x3 4-Way Flow (FCE)



### High Performance

R32 refrigerant properties boost the capacity of units for selected model to achieve full tonnage.

| Capacity (Btu/hr) |        |
|-------------------|--------|
| Size              | R32    |
| 50                | 18,500 |
| 71                | 24,000 |
| 125               | 42,000 |



### High Air Flow

High air flow ensures the spaces of the room to be cooled down rapidly to the set temperature.



### Energy Saving

R32 refrigerant properties provide better heat transfer compared to R410A refrigerant. Therefore, the efficiency is tremendously improved by 12%. Average EER increases as shown.



### Slim Unit Design

Low height of 246mm designed to fit into tight ceiling as well as saving space.



### 4 – Way Air Flow Discharge

This unit promotes even air distribution covering every corner of the room by combining 4-ways air discharge and larger discharge area.

### ON / OFF Timer

Operation starts when the pre-set time of the ON timer elapses and stops when the pre-set time of the OFF timer elapses. This setting can be set from wireless LCD remote controller or wired LCD remote controller. Based on real time clock

### Indoor Unit ON/OFF Switch

Enables to operate the unit even if the remote controller is misplaced or the remote's battery is weak. Pre-set at 24°C cool mode, just press the ON/OFF switch for instant cooling comfort.


### Stronger Air Draft

Motors are designed to boost higher airflow.



### Unified Square Panels

Panel size is the same for all models. It is easy to maintain a neat appearance when multiple units are installed in the same room.

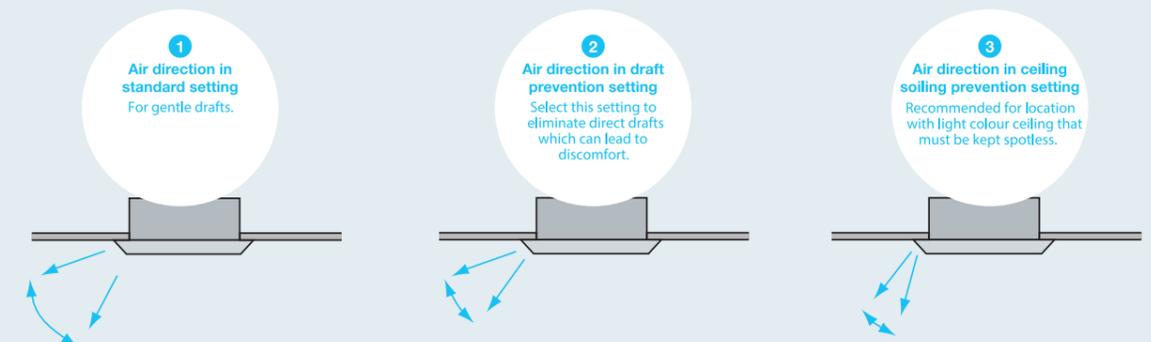

### Optimal Comfort and Convenience Assured by Air Discharge Modes


To increase the comfort level of the air conditioned area, the system is built-in with 3 different types of air flow pattern to suit different requirements. Note: The default setting for air swing pattern is 1. The air swing pattern can be selected through the wireless remote control.

# Easy Installation and Serviceability




## Lightweight

All models can be installed without using a lifter.




## Easy Height Adjustment

Each corner of the unit has an adjuster pocket that allows you to easily adjust the unit's suspended height.

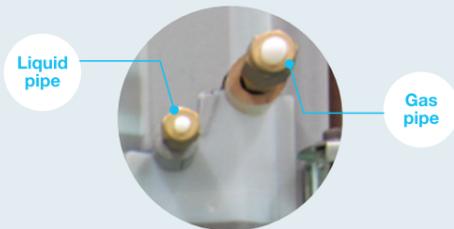

## Position of Connecting Pipe and Drain Hose

In order to create more space for installer to work on connection pipe of indoor unit, the connection pipe of gas and liquid are located further from each other and purposely not aligned to hanging hook. To enhance the convenience of installation by relocating drain hose location to another side of cassette unit (not same side with connection pipe).

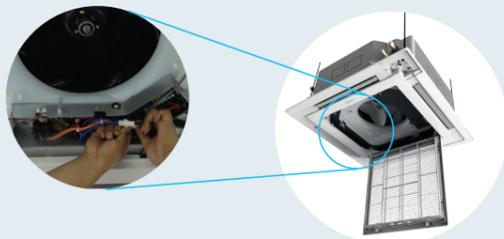

## Easy Accessible to Control Box Location

The control box is now located in a more convenient and accessible space. Without adjusting the panel, control box can be directly accessed from the intake grille. Extra time saving on installation or servicing.

Washer fixing plate




## Easy Hanging

Washer fixing plates secure washers in place and prevent washers from falling for easy installation.



## Easy Removal of Corner Cover

It is possible to easily remove without use of screws or tools.

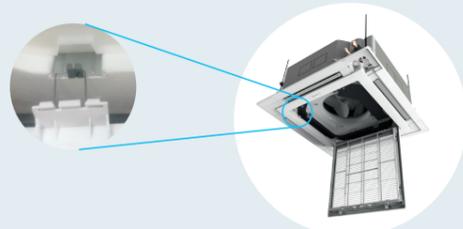

## Panel Hook Mechanism

This feature enables the installer to work with both hands as the panel can be hung on the unit.



Drain plug  
Drain outlet  
(with rubber plug)

Just open the intake grille!


## Condition of the Drain Pan and Drain Water

Can be checked by removing the suction grille and drain plug.



## Flexible Drain Hose (Supplied together with cassette indoor unit)

Flexible drain hose of 200mm is provided as standard. Ensure the height of drain pipe from ceiling is  $\leq 700\text{mm}$  to prevent water leak.

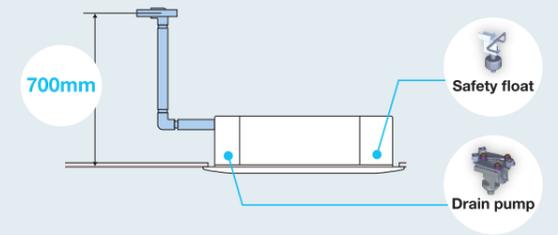

## Drain Pump is Equipped as Standard

The unit comes with high head drain pump of 700mm\* pressure head as standard. Drainage Protection: Safety Float incorporated in drain pump. Its function is to monitor water level and trigger drain pump to cut in when drainage water reached certain level.

\*700mm calculated from drain pipe outlet to highest elevation point

# Cleanliness



## Saranet Filters

Functions as standard dust filtration with 55% efficiency. Supplied as standard with Cassette 3x3 panel.



## Non-Flocking Flaps

Flaps can be detached without the use of tools. Condensation does not easily form and dirt does not cling to non-flocking flaps. They are easy to clean.

# The Daikin R32 Next-Generation Refrigerant

## Ceiling Concealed Medium Static Pressure (FDMC)



### High Performance




R32 refrigerant properties boost the capacity of units for selected model to achieve full tonnage.

| Size | Capacity (Btu/hr) |                     |
|------|-------------------|---------------------|
|      | R410A             | R32                 |
| 50   | 17,400            | 18,500 ↑            |
| 60   | 20,800            | 23,500 ↑            |
| 85   | 30,000            | 30,000              |
| 100  | 36,000            | 36,000              |
| 125  | 42,000            | 42,000              |
| 140  | 47,000            | 48,000 ↑ (Full 4TR) |



### Energy Saving

R32 refrigerant properties provide better heat transfer compared to R410A refrigerant. Therefore, the efficiency is tremendously improved by 16%. Average EER increases as shown.

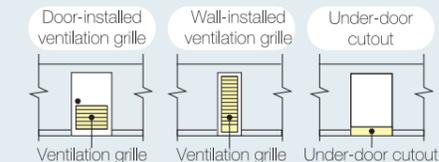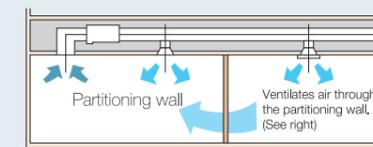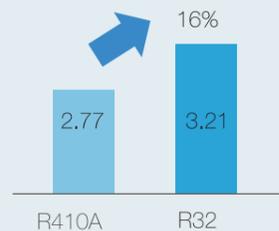

### Simultaneous Air Conditioning of Two Rooms and Ventilation Grille (Ventilation Opening)

When air conditioning two rooms simultaneously, the air discharged into each room must be circulated back to the air conditioner. To achieve this, a ventilation duct should be installed for each room or one of the indicated ventilation grilles should be installed on the partitioning wall or under the door between the rooms.

Note: The under-door cutout method should be used only when there is a small volume of airflow.



### Switchable Fan Speed: 3 Steps

The unit has up to 3 different fan speeds available for comfort selection.

### Auto Fan Speed

Automatically controls fan speed to adjust the room temperature to the set temperature.

### Programmed Dry Function

When the air humidity is high, the unit can be operated in Dry Mode to keep the room dehumidified while maintaining the room temperature increasing the comfort level.

| Size              | 50 | 60 | 85 | 100 | 125 | 140 |
|-------------------|----|----|----|-----|-----|-----|
| Standard ESP (Pa) | 30 | 30 | 30 | 50  | 50  | 50  |
| High ESP (Pa)     | 50 | 50 | 50 | 80  | 80  | 80  |

### Easy Selectable ESP (External Static Pressure)

2-different ESP can be easily selected by switching the connector inside the control box as shown below. According to duct design required for comfort, the adjustment can be done easily during installation at the control box.



# Design and Installation Flexibility




## Extreme Low Height of Units

Installation is possible even in buildings with narrow ceiling spaces.


## Pre-Holding Mechanism

Bottom Panel and Control Box are designed with Pre-Holding Mechanism to ease installation works by possibly reducing labour work.

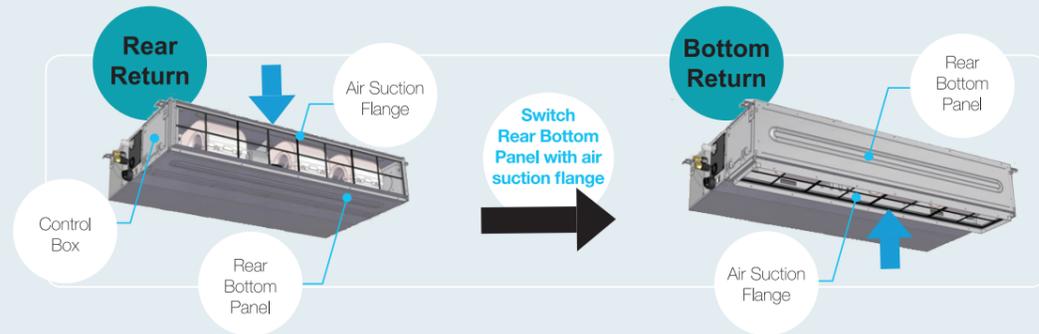

## Convertible Return Air Configuration

Easy conversion from rear return to bottom return is possible to be done on new ceiling concealed to fit in according to building structures.

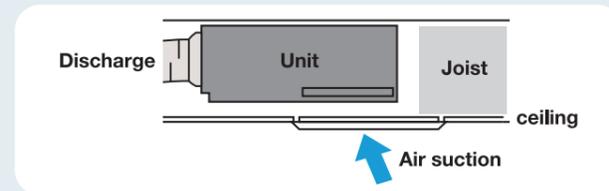


# Easy Service Maintenance




## Drain Pan Maintenance Check Window

Allow the checking of drainage or dirt in the drain pan without requiring any tools.

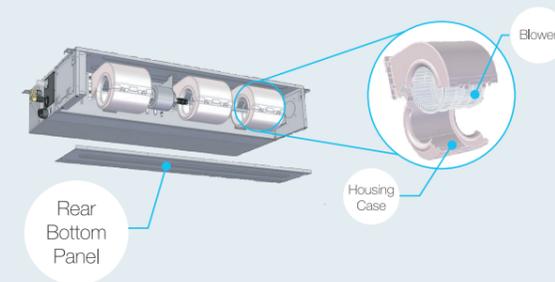

## Easy Access to Blowers and Motors


Blowers and Motors can be easily accessible by just removing rear bottom panel and mid flange as shown. Blowers can be removed from the housing easily as well by opening the housing case.

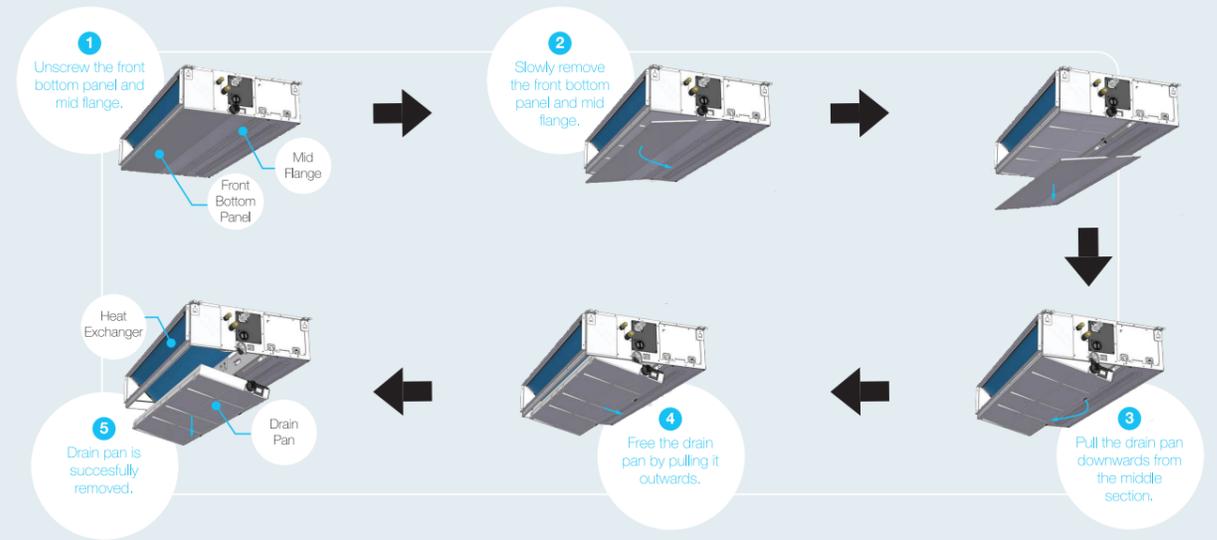

## Easy Access to Drain Pan and Coil

Drain Pan and Coil can be easily accessible by removing front bottom panel and mid flange. Followed by steps as shown above, coil can be accessed once drain pan is removed.

# Options

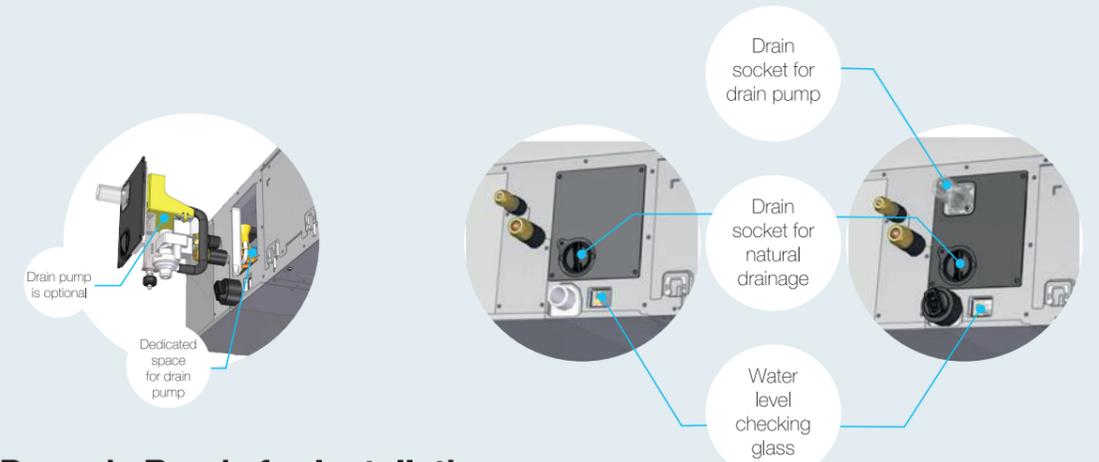


## Drain Pump is Ready for Installation

Drain pump is an optional accessory for new ceiling concealed model. If drain pump is required, it could be purchased as accessories and installed at the designated location of the unit.

## Saranet Filter

Function as dust filtration to trap dust in the air. Saranet filter is packed as accessory for ceiling concealed model.



# The Daikin R32 Next-Generation Refrigerant

## Floor Standing (FVC)



### High Performance

R32 refrigerant properties boost the capacity of units for selected model to achieve full tonnage.

| Size | Capacity (Btu/hr) |                            |
|------|-------------------|----------------------------|
|      | R410A             | R32                        |
| 85   | 29,000            | 29,000                     |
| 100  | 36,000            | 36,000                     |
| 125  | 42,000            | 42,000                     |
| 140  | 45,000            | <b>48,000</b> ↑ (Full 4TR) |



### High Air Flow

High air flow ensures the spaces of the room to be cooled down rapidly to the set temperature.



### Energy Saving

R32 refrigerant properties provide better heat transfer compared to R410A refrigerant. Therefore, the efficiency is tremendously improved by 11%. Average EER increases as shown.




### Auto-Swing Mode

This unit uses its automatic horizontal swing louver to spread comfortable air flow to cool every corner of the room. Its vertical louvers are adjusted manually to match different interior spaces and partition as well as to avoid direct airflow.



### User-Friendly Controls

The unit comes with a stylish black control panel with white LED light for clear display. It comes with a keylock function to prevent setting change from unauthorised personnel.

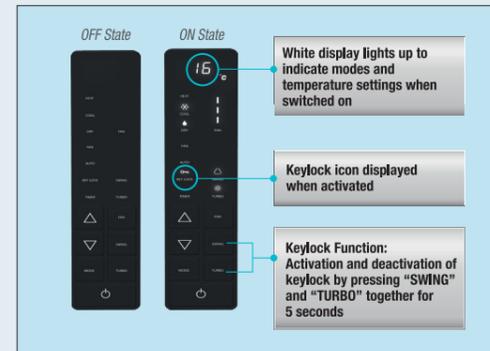

Additionally, this unit is incorporated with infrared sensor for usage with wireless controller (BRC52A62) which comes with the unit as the standard package. Thus, it can also be controlled using wireless controller for the flexibility in controls.



### Two Selectable Temperature Sensors

Both indoor unit and wired remote controller (option) contain temperature-sensors. Temperature sensing can be set at the unit or, to further improve comfort level, closer to the target area at the wired remote control. This feature must be set during commissioning by the technicians.

\*Temperature-sensor on indoor unit must be used when the air conditioner is controlled from another room.  
\*\*Wireless remote controller does not have a temperature-sensor

### Switchable Fan Speed:

High → Medium → Low

The unit has up to 3 different fan speeds available for comfort selection.

### Timer Selector

Operation starts when the preset time of the ON timer elapses and stops when the preset time of the OFF timer elapses.

### Powerful / Turbo Operation

New powerful operation boosts airflow to maximum volume for a 20-minute period with highest fan speed. After this, the unit automatically returns to its previous settings.

### Indoor Unit ON/OFF Switch

The unit can be conveniently started manually in the event the wireless remote controller is misplaced or the wireless remote controller batteries are not charged.

## Easy Maintenance

### Safety Clip

The safety clip feature allows the users to remove the washable saranet filter with ease during maintenance. At the same time, it also acts as a safety feature to prevent the users from reaching into the electrical and mechanical components.



### Space for Water Drain Pump

There is a space in the unit below the fan that allows users to install an external condensate water pump.

\* The condensate water drain pump is separately purchased and field installed.



# Outdoor



RC50/60A  
RE50/71A



RC85A



RC100/125/140A  
RE125A




## High Performance R32 Compressor

R32 Non-Inverter SkyAir is utilizing high performance compressors to achieve higher EER.

## Longer Piping Length

Improved piping length to provide installation flexibility.

| Size                     | 50 | 60 | 71 | 85 | 100 | 125 | 140 |
|--------------------------|----|----|----|----|-----|-----|-----|
| Max Piping Length (m)    | 35 | 35 | 35 | 50 | 50  | 50  | 50  |
| Max Piping Elevation (m) | 20 | 20 | 20 | 30 | 30  | 30  | 30  |

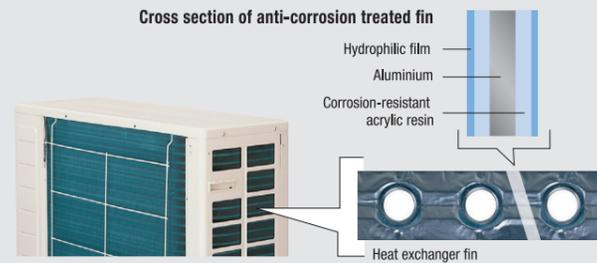


## Anti-Corrosion Treatment of Outdoor Heat Exchanger

The outdoor unit's heat exchanger fins are processed using a special anti-corrosion treatment. The surface is covered with a thin acrylic resin layer to provide enhanced resistance to salt corrosion.

## High Durability

Outdoor Casing : Adopt zinc coated heavy gauge galvanized steel, with exterior surfaces finished with a weather resistant polyester powder casing, painted with ivory white colour to increase the durability of the outdoor casing.

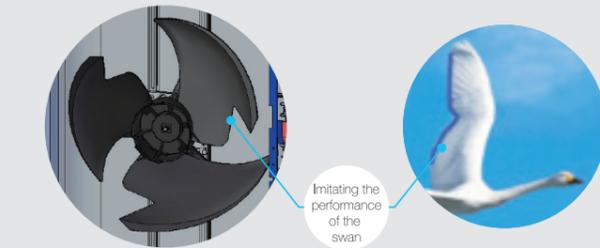

## V-Cut Propeller Fan

Through the use of a V-cut propeller fan that imitates the efficiency of the swan, a migratory bird, airflow becomes smooth as friction loss is reduced. Therefore, performance increases tremendously. Furthermore, it reduces the sound pressure level as shown below.

## Quiet Operation

| Sound Pressure Level (dBA) | 50 | 60 | 71 | 85 | 100 | 125 | 140 |
|----------------------------|----|----|----|----|-----|-----|-----|
| R32                        | 52 | 52 | 52 | 53 | 55  | 58  | 60  |


# Controllers

## Wireless Controller ARC487A1 (Cooling Only)




- 1 On/Off
- 2 Temperature Setting
- 3 Fan Speed
- 4 Mode
- 5 Timer
- 6 Swing

## Wireless Controller BRC52A62 (Cooling Only)

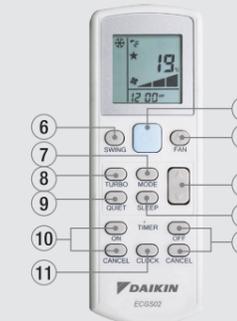


- 1 "Glow-in-the-dark" ON/OFF switch
- 2 Fan speed selection: Low, Medium, High, Auto
- 3 Temperature setting: Up & down
- 4 Sleep mode function
- 5 Off timer setting
- 6 Vertical auto-swing
- 7 Selectable mode: Cool, Dry, Fan
- 8 Turbo function
- 9 Quiet function
- 10 On timer setting
- 11 Real time clock

## Wired Controller BRC51A62 (Cooling Only)

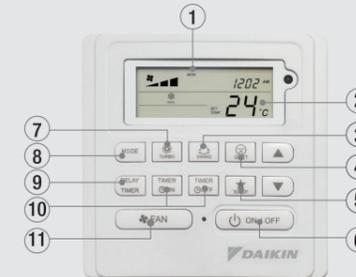


- 1 Real time clock and day display
- 2 Temperature operate in °C and °F
- 3 Swing function
- 4 Quiet function
- 5 Sleep function
- 6 ON/OFF switch
- 7 Turbo function
- 8 Cool, Dry, Fan mode
- 9 Delay timer (1 or 2 hours)
- 10 7-days programmable timer
- 11 Low, Medium, High, Auto fan speed

## Wired Controller (Optional Accessory)

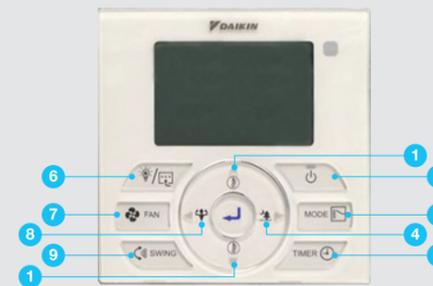

## BRC51D61

- 1 Temperature Setting
- 2 ON/OFF Button
- 3 Mode: Press to select operating mode: COOL, DRY or FAN
- 4 Quiet Operation
- 5 Timer
- 6 Features Selection (Sleep, Quiet and Powerful)
- 7 Fan Operation
- 8 Powerful Operation
- 9 Swing

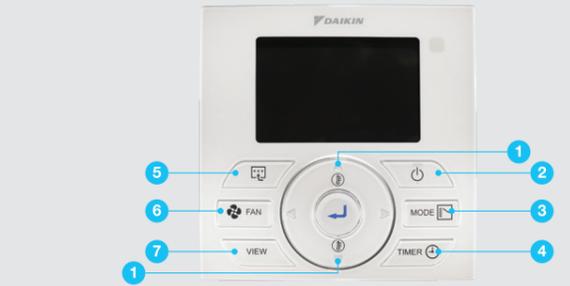

## BRC51D62

- 1 Temperature Setting
- 2 ON/OFF Button
- 3 Mode: Press to select operating mode: COOL, DRY or FAN
- 4 Timer
- 5 Features Selection (Sleep)
- 6 Fan Operation
- 7 View (Backlight)

Remark : Refer Function Overview for applicable model

## Built-in Temperature Sensor in Wired Controllers

All wired controllers has a built-in temperature sensor that enables temperature sensing closer to target area for improved comfort. It can be connected directly to the unit's main board to start operating without extra settings or modifications. This feature can be set by installers during the commissioning.

# Network Controls

## Simple System that Provides Flexibility of Controls

|   | Control Pattern   | Remote Controls |
|---|---|-----------------|
| Group control by Network Interface module (NIM)                   | For simultaneous control of up to 16 indoor units   |                 |
| Sequential control by Sequential Network Interface Module (S-NIM) | For sequential control of 2 indoor units at alternate sequence of pre-set hour  |                 |
| Control by external command using BAG                             | Operation and surveillance is carried out using the contact signal from the operation control box in the building surveillance (security) room. |                 |

## Group Control by Network Interface Module (NIM)



NIM controller

The NIM group controls consist of:

- Mainboard
- Control panel (BRC51A62)
- NIM controller
- Communication bus

NIM utilizes master-slave configurations. One master can control up to 15 slave units in a group. The master unit operates in conjunction with a control panel. Any settings done via the control panel connected to the master overwrite the settings of its slave units. Slave units can be operated with or without control panel. If a slave unit is operating with a control panel, its settings can be changed without following its master's.

- DIP switch setting for group and unit address
- Automatic detection of control panel
- Error codes and error unit's ID indication on control panel

### Supported configurations of NIM:

|          | Master | Slave |
|----------|--------|-------|
| BRC51A62 | •      | •     |
| BRC52A62 |        | •     |

# Product Features

## Cooling Comfort



### Powerful Mode

Once activated, this feature will engage the indoor fan motor to run at maximum speed for 20 minutes. The turbo airflow enables the desired temperature to be achieved faster, especially in larger spaces. Remark: Only applicable to FCC-A series.

## Reliability



### Flexible Piping

Designed for your convenience, this series come with piping lengths up to 30m & 50m, for high flexibility in system design and installation.



### Auto-Restart with Surge Protection

If there is a sudden power failure, the unit will automatically restart with 64 different recovery patterns according to its last settings. This also prevents a sudden surge of electricity to your power source.

## Serviceability Friendly



### Self-Diagnosis Function

This intelligent feature helps to detect faults of malfunctioning in the system.

Warning can be found through display error code in wired LCD remote controller. This information can be found in Installation Manual.

## Lifestyle Convenience



### Sleep Mode

Unwind at the end of the day with Sleep Mode, which gradually increases set temperature according to regular sleeping temperature patterns for an effortlessly personalised sleeping environment.



### Quiet Mode

Reduce background noise with Quiet Mode, which decreases the sound pressure level to as low as 35dBA. Remark: Only applicable to FCC-A series



### Timer

This timer can start or stop the air conditioner within a 24-hour period and can be preset in 30 minute steps using the wireless remote controller. The On Timer and Off Timer can be used in combination.



## Cleaner Environment



### Clean Air

The Saranet Air Filter and Micron-level fiber traps airborne dust particles in the air. The filters can be easily accessed or replaced without tools via the detachable front panel.

# Functions Overview

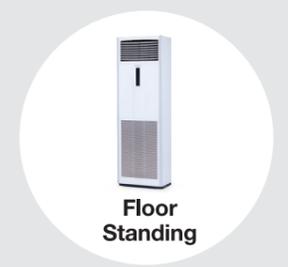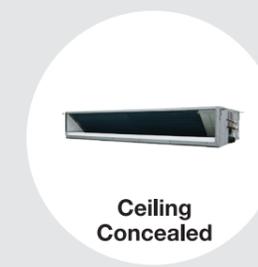

| Category                                 | Functions  | FCC-A                    | FCE-A                  | FDMC-A                   | FVC-A                    |
|--|--|--------------------------|------------------------|--------------------------|--------------------------|
| Basic Function                           | Inverter   | -                        | -                      | -                        | -                        |
|  | Operation Limit for Cooling (°CDB)(O/D)                        | 19~46                    | 19~46                  | 19~46                    | 19~46                    |
|  | Operation Limit for Cooling (°FDB)(O/D)                        | 66.2~114.8               | 66.2~114.8             | 66.2~114.8               | 66.2~114.8               |
| Compressor                               | Rotary Compressor (50-125)                                     | 5.42-12.31 kW            | •                      | 5.42-12.31 kW            | 8.50 -12.31 kW           |
|  | Scroll Compressor (140)  | 14.07 kW                 | -                      | 14.07 kW                 | 14.07 kW                 |
| Comfortable Airflow                      | 4-Way Airflow Operation  | -                        | •                      | -                        | -                        |
|  | 8-Way Airflow Operation  | •                        | -                      | -                        | -                        |
| Comfort Control                          | Auto Fan Speed   | •                        | •                      | •                        | •                        |
|  | Indoor Unit Quiet Operation                                    | •                        | •                      | -                        | -                        |
| Operation                                | Programme Dry Function   | •                        | •                      | •                        | •                        |
|  | Fan Only   | •                        | •                      | •                        | •                        |
| Lifestyle Convenience                    | Indoor Unit ON/OFF Button                                      | •                        | •                      | -                        | •                        |
|  | Signal Receiving Sign *1                                       | •                        | •                      | -                        | •                        |
|  | R/C with Backlight *2  | •*                       | •*                     | •*                       | •*                       |
|  | Room Temperature Display *2                                    | •*                       | •*                     | •*                       | •*                       |
| Health & Clean                           | Saranet Filter *4  | •                        | •                      | •                        | •                        |
|  | Ionizer  | -                        | -                      | -                        | -                        |
|  | Washable Grille  | •                        | •                      | -                        | •                        |
| Timer                                    | Weekly Timer Operation *3                                      | •*                       | •*                     | •                        | •*                       |
|  | 24-hour ON/OFF Timer (R/C) *1                                  | •                        | •                      | •*                       | •                        |
| Worry Free<br>(Reliability & Durability) | Auto Restart (after Power Failure)                             | •                        | •                      | •                        | •                        |
|  | Self-diagnosis   | •                        | •                      | •                        | •                        |
|  | Wiring Error Check Function                                    | 8.5-14.0kW (3phase only) | 12.5kW ( 3 phase only) | 8.5-14.0kW (3phase only) | 8.5-14.0kW (3phase only) |
|  | Anti-corrosion Treatment of Outdoor Heat Exchanger             | Blue Fin                 | Blue Fin               | Blue Fin                 | Blue Fin                 |
|  | R32 Refrigerant Gas Leak Sensor                                | -                        | -                      | -                        | •                        |
| Flexibility                              | ESP Selection  | -                        | -                      | •                        | -                        |
|  | Water Pump (Water Drainage Pipe Flexibility)                   | •                        | •                      | •*                       | •*                       |
|  | °F/°C Changeover R/C Temperature Display (Factory setting: °C) | •                        | -                      | •                        | •                        |
|  | Pre-charged Piping Length                                      | 7.5m                     | 7.5m                   | 7.5m                     | 7.5m                     |
| Remote Control                           | NIM Adaptor  | •*                       | -                      | •*                       | •*                       |
|  | Sequential NIM Adaptor   | •*                       | -                      | •*                       | •*                       |
|  | BAG  | •*                       | -                      | •*                       | •*                       |
| Remote Controller                        | Wireless (ARC487A1)  | -                        | •                      | -                        | -                        |
|  | Wireless (BRC52A62)  | •                        | -                      | •*                       | •                        |
|  | Wired (BRC51A62)   | •*                       | •*                     | •                        | -                        |
|  | Wired (BRC51D61) (SHIRO)                                       | •*                       | •*                     | -                        | •*                       |
|  | Wired (BRC51D62) (SHIRO)                                       | -                        | -                      | •*                       | -                        |

Note:

- : Available
- : Not Available
- \* : Optional

(Refer to DAMA Spare Part team for more details on optional items.)

\*1: Applicable when wireless R/C is used for selected models.

\*2: Applicable when BRC51D61/62 is used.

\*3: Applicable when BRC51A62 and BRC51D61/62 are used.

\*4: Filter packed as accessory for ducted model.

# Specifications

## R32 Non-Inverter Ceiling Cassette 8-Way Flow Specification

| Model                    | Indoor unit                         |                      | FCC50A       | FCC60A           | FCC85A          | FCC85A           |
|--------------------------|-------------------------------------|----------------------|--------------|------------------|-----------------|------------------|
|                          | Outdoor unit                        |                      | RC50A        | RC60A            | RC85A (1 ph)    | RC85A (3 ph)     |
| Operating Limit          | °C                                  |                      | 19~46        | 19~46            | 19~46           | 19~46            |
| Cooling Capacity         | Btu/h                               |                      | 18500        | 24000            | 30000           | 30000            |
|                          | kW                                  |                      | 5.42         | 7.03             | 8.79            | 8.79             |
| EER                      | W/W                                 |                      | 3.23         | 3.30             | 3.24            | 3.26             |
| Total Power Input        | W                                   |                      | 1680         | 2130             | 2710            | 2700             |
| Total Current            | A                                   |                      | 7.46         | 9.45             | 11.9            | 4.48             |
| Power supply             | V/Ph/Hz                             |                      | 220-240/1/50 | 220-240/1/50     | 220-240/1/50    | 380/415-3/50     |
|                          | Power from Outdoor                  |                      |              |                  |                 |                  |
| Indoor                   | Airflow (H/M/L/Q)                   |                      | CFM          | 840/700/560/440  | 890/760/620/490 | 890/760/620/490  |
|                          | External Static Pressure (Std/High) |                      | Pa           | -                | -               | -                |
|                          | Sound Pressure Level (H/M/L/Q)      |                      | dBA          | 42/39/37/35      | 44/40/37/35     | 44/40/37/35      |
|                          | Unit Dimension (H x W x D)          | Unit                 | mm           | 246 X 840 X 840  |                 |                  |
|                          |                                     | Packaging            | mm           | 324 X 922 X 922  |                 |                  |
|                          | Panel Dimension (H x W x D)         | Panel                | kg           | 69 X 950 X 950   |                 |                  |
|                          |                                     | Packaging            | kg           | 147 X 1008 X 970 |                 |                  |
|                          | Machine Weight                      | Unit                 | kg           | 22               | 22              | 22               |
|                          | Panel Weight                        | Panel                | kg           | 5                | 5               | 5                |
|                          | Outdoor                             | Sound Pressure Level |              | dBA              | 52              | 52               |
| Dimension (H x W x D)    |                                     | Unit                 | mm           | 615 X 845 X 300  | 615 X 845 X 300 | 695 X 930 X 350  |
|                          |                                     | Packaging            | mm           | 679 X 992 X 414  | 679 X 992 X 414 | 760 X 1084 X 473 |
| Machine Weight           |                                     | kg                   | 40           | 46               | 56              | 57               |
| Pipe Connection          | Liquid                              | mm                   | 6.4          | 6.4              | 9.5             | 9.5              |
|                          | Gas                                 | mm                   | 12.7         | 12.7             | 15.9            | 15.9             |
| Maximum Piping Length    | m                                   |                      | 35           | 35               | 50              | 50               |
| Maximum Piping Elevation | m                                   |                      | 20           | 20               | 30              | 30               |
| Heat Insulation          | Both Liquid and Gas Piping          |                      |              |                  |                 |                  |

| Model                    | Indoor unit                         |                      | FCC100A      | FCC125A           | FCC140A           |
|--------------------------|-------------------------------------|----------------------|--------------|-------------------|-------------------|
|                          | Outdoor unit                        |                      | RC100A       | RC125A            | RC140A            |
| Operating Limit          | °C                                  |                      | 19~46        | 19~46             | 19~46             |
| Cooling Capacity         | Btu/h                               |                      | 36000        | 42000             | 48000             |
|                          | kW                                  |                      | 10.55        | 12.31             | 14.07             |
| EER                      | W/W                                 |                      | 3.28         | 3.40              | 3.43              |
| Total Power Input        | W                                   |                      | 3220         | 3620              | 4100              |
| Total Current            | A                                   |                      | 5.97         | 6.78              | 7.59              |
| Power supply             | V/Ph/Hz                             |                      | 380-415/3/50 | 380-415/3/50      | 380-415/3/50      |
|                          | Power from Outdoor                  |                      |              |                   |                   |
| Indoor                   | Airflow (H/M/L/Q)                   |                      | CFM          | 1120/1030/890/760 | 1120/1030/890/760 |
|                          | External Static Pressure (Std/High) |                      | Pa           | -                 | -                 |
|                          | Sound Pressure Level (H/M/L/Q)      |                      | dBA          | 48/46/43/40       | 48/46/43/40       |
|                          | Unit Dimension (H x W x D)          | Unit                 | mm           | 288 X 840 X 840   |                   |
|                          |                                     | Packaging            | mm           | 370 X 922 X 922   |                   |
|                          | Panel Dimension (H x W x D)         | Panel                | kg           | 69 X 950 X 950    |                   |
|                          |                                     | Packaging            | kg           | 147 X 1008 X 970  |                   |
|                          | Machine Weight                      | Unit                 | kg           | 25                | 25                |
|                          | Panel Weight                        | Panel                | kg           | 5                 | 5                 |
|                          | Outdoor                             | Sound Pressure Level |              | dBA               | 55                |
| Dimension (H x W x D)    |                                     | Unit                 | mm           | 852 X 1030 X 400  | 852 X 1030 X 400  |
|                          |                                     | Packaging            | mm           | 995 X 1136 X 516  |                   |
| Machine Weight           |                                     | kg                   | 64           | 79                | 84                |
| Pipe Connection          | Liquid                              | mm                   | 9.5          | 9.5               | 9.5               |
|                          | Gas                                 | mm                   | 15.9         | 15.9              | 15.9              |
| Maximum Piping Length    | m                                   |                      | 50           | 50                | 50                |
| Maximum Piping Elevation | m                                   |                      | 30           | 30                | 30                |
| Heat Insulation          | Both Liquid and Gas Piping          |                      |              |                   |                   |

Remarks:  
 1. Due to product innovation, all specifications are subjected to change by the manufacturer without prior notice.  
 2. All units are being tested and comply to ISO5151.  
 3. Nominal cooling capacity are based on the conditions: 27°C DB / 19°C WB indoor and 35°C DB outdoor.  
 4. Sound pressure levels are measured in anechoic chamber according to JIS C 9612 standard. During actual operation, sound pressure level will be higher as a result of room specification condition.

# Specifications

## R32 Non-Inverter Ceiling Cassette 4-Way Flow Specification

| Model                    | Indoor unit                         |                      | FCE50AV14    | FCE71AV14        | FCE125AV14      |
|--------------------------|-------------------------------------|----------------------|--------------|------------------|-----------------|
|                          | Outdoor unit                        |                      | RE50AV14     | RE71AV14         | RE125AY14       |
| Operating Limit          | °C                                  |                      | 19~46        | 19~46            | 19~46           |
| Cooling Capacity         | Btu/h                               |                      | 18500        | 24000            | 42000           |
|                          | kW                                  |                      | 5.42         | 7.03             | 12.31           |
| EER                      | W/W                                 |                      | 3.23         | 3.30             | 3.40            |
| Total Power Input        | W                                   |                      | 1680         | 2130             | 3620            |
| Total Current            | A                                   |                      | 7.46         | 9.45             | 6.78            |
| Power supply             | V/Ph/Hz                             |                      | 220-240/1/50 | 220-240/1/50     | 380-415/3/50    |
|                          | Power from Outdoor                  |                      |              |                  |                 |
| Indoor                   | Airflow (H/M/L/Q)                   |                      | CFM          | 840/700/560/440  | 890/760/620/490 |
|                          | External Static Pressure (Std/High) |                      | Pa           | -                | -               |
|                          | Sound Pressure Level (H/M/L/Q)      |                      | dBA          | 42/39/37/35      | 44/40/37/35     |
|                          | Unit Dimension (H x W x D)          | Unit                 | mm           | 246 X 840 X 840  |                 |
|                          |                                     | Packaging            | mm           | 324 X 922 X 922  |                 |
|                          | Panel Dimension (H x W x D)         | Panel                | kg           | 65 X 950 X 950   |                 |
|                          |                                     | Packaging            | kg           | 116 X 1008 X 990 |                 |
|                          | Machine Weight                      | Unit                 | kg           | 22               | 22              |
|                          | Panel Weight                        | Panel                | kg           | 5                | 5               |
|                          | Outdoor                             | Sound Pressure Level |              | dBA              | 52              |
| Dimension (H x W x D)    |                                     | Unit                 | mm           | 615 X 845 X 300  | 615 X 845 X 300 |
|                          |                                     | Packaging            | mm           | 679 X 992 X 414  | 679 X 992 X 414 |
| Machine Weight           |                                     | kg                   | 40           | 46               | 79              |
| Pipe Connection          | Liquid                              | mm                   | 6.4          | 6.4              | 9.5             |
|                          | Gas                                 | mm                   | 12.7         | 12.7             | 15.9            |
| Maximum Piping Length    | m                                   |                      | 35           | 35               | 50              |
| Maximum Piping Elevation | m                                   |                      | 20           | 20               | 30              |
| Heat Insulation          | Both Liquid and Gas Piping          |                      |              |                  |                 |

Remarks:  
 1. Due to product innovation, all specifications are subjected to change by the manufacturer without prior notice.  
 2. All units are being tested and comply to ISO5151.  
 3. Nominal cooling capacity are based on the conditions: 27°C DB / 19°C WB indoor and 35°C DB outdoor.  
 4. Sound pressure levels are measured in anechoic chamber. During actual operation, sound pressure level will be higher as a result of room specification condition.

# Specifications

## R32 Non-Inverter Ceiling Concealed Specification

| Model                    | Indoor unit                         |           | FDMC50A         | FDMC60A         | FDMC85A         |                  |    |
|--------------------------|-------------------------------------|-----------|-----------------|-----------------|-----------------|------------------|----|
|                          | Outdoor unit                        |           | RC50A           | RC60A           | RC85A (1 ph)    | RC85A (3 ph)     |    |
| Operating Limit          |                                     | °C        | 19~46           | 19~46           | 19~46           | 19~46            |    |
| Cooling Capacity         |                                     | Btu/h     | 18500           | 23500           | 30000           | 29500            |    |
|                          |                                     | kW        | 5.42            | 6.89            | 8.79            | 8.65             |    |
| EER                      |                                     | W/W       | 3.10            | 3.01            | 3.17            | 3.18             |    |
| Total Power Input        |                                     | W         | 1750            | 2290            | 2770            | 2720             |    |
| Total Current            |                                     | A         | 7.74            | 10.3            | 12.2            | 4.52             |    |
| Power supply             |                                     | V/Ph/Hz   | 220-240/1/50    | 220-240/1/50    | 220-240/1/50    | 380-415/3/50     |    |
|                          | Power from Outdoor                  |           |                 |                 |                 |                  |    |
| Indoor                   | Airflow (SH/H/M/L)                  | CFM       | 590/590/525/430 |                 | 950/950/810/700 |                  |    |
|                          | External Static pressure (Std/High) | Pa        | 30/50           |                 |                 |                  |    |
|                          | Sound Pressure Level (H/M/L)        | dB(A)     | 40/37/34        | 40/37/34        | 41/38/35        | 41/38/35         |    |
|                          | Unit Dimension (H x W x D)          | Unit      | mm              | 250 X 700 X 700 |                 | 250 X 1000 X 700 |    |
|                          |                                     | Packaging | mm              | 337 X 916 X 924 |                 | 337 X 1216 X 924 |    |
|                          | Machine Weight                      | Unit      | kg              | 24              | 24              | 31               | 31 |
| Outdoor                  | Sound Pressure Level                | dB(A)     | 52              | 52              | 53              | 53               |    |
|                          | Dimension (H x W x D)               | Unit      | mm              | 615 X 845 X 300 |                 | 695 X 930 X 350  |    |
|                          |                                     | Packaging | mm              | 679 X 992 X 414 |                 | 760 X 1084 X 473 |    |
|                          | Machine Weight                      | kg        | 40              | 46              | 56              | 57               |    |
| Pipe Connection          | Liquid                              | mm        | 6.4             | 6.4             | 9.5             | 9.5              |    |
|                          | Gas                                 | mm        | 12.7            | 12.7            | 15.9            | 15.9             |    |
| Maximum Piping Length    | m                                   | 35        | 35              | 50              | 50              |                  |    |
| Maximum Piping Elevation | m                                   | 20        | 20              | 30              | 30              |                  |    |
| Heat Insulation          | Both Liquid and Gas Piping          |           |                 |                 |                 |                  |    |

| Model                    | Indoor unit                         |           | FDMC100A           | FDMC125A         | FDMC140A     |  |
|--------------------------|-------------------------------------|-----------|--------------------|------------------|--------------|--|
|                          | Outdoor unit                        |           | RC100A             | RC125A           | RC140A       |  |
| Operating Limit          |                                     | C         | 19~46              | 19~46            | 19~46        |  |
| Cooling Capacity         |                                     | Btu/h     | 36000              | 42000            | 48000        |  |
|                          |                                     | kW        | 10.55              | 12.31            | 14.07        |  |
| EER                      |                                     | W/W       | 3.25               | 3.36             | 3.43         |  |
| Total Power Input        |                                     | W         | 3250               | 3660             | 4100         |  |
| Total Current            |                                     | A         | 6.00               | 6.85             | 7.51         |  |
| Power supply             |                                     | V/Ph/Hz   | 380-415/3/50       | 380-415/3/50     | 380-415/3/50 |  |
|                          | Power from Outdoor                  |           |                    |                  |              |  |
| Indoor                   | Airflow (SH/H/M/L)                  | CFM       | 1260/1260/1095/920 |                  |              |  |
|                          | External Static Pressure (Std/High) | Pa        | 50/80              |                  |              |  |
|                          | Sound Pressure Level (H/M/L)        | dB(A)     | 42/39/36           |                  |              |  |
|                          | Unit Dimension (H x W x D)          | Unit      | mm                 | 250 X 1400 X 700 |              |  |
|                          |                                     | Packaging | mm                 | 337 X 1616 X 924 |              |  |
| Machine Weight           | Unit                                | kg        | 40                 | 40               | 42           |  |
| Outdoor                  | Sound Pressure Level                | dB(A)     | 55                 | 58               | 60           |  |
|                          | Dimension (H x W x D)               | Unit      | mm                 | 852 X 1030 X 400 |              |  |
|                          |                                     | Packaging | mm                 | 995 X 1136 X 516 |              |  |
|                          | Machine Weight                      | kg        | 64                 | 79               | 84           |  |
| Pipe Connection          | Liquid                              | mm        | 9.5                | 9.5              | 9.5          |  |
|                          | Gas                                 | mm        | 15.9               | 15.9             | 15.9         |  |
| Maximum Piping Length    | m                                   | 50        | 50                 | 50               |              |  |
| Maximum Piping Elevation | m                                   | 30        | 30                 | 30               |              |  |
| Heat Insulation          | Both Liquid and Gas Piping          |           |                    |                  |              |  |

Remarks:  
 1. Due to product innovation, all specifications are subjected to change by the manufacturer without prior notice.  
 2. All units are being tested and comply to ISO 13253 (Ducted unit).  
 3. Nominal cooling capacity are based on the conditions: 27°C DB / 19°C WB indoor and 35°C DB outdoor.  
 4. Sound pressure levels are measured in anechoic chamber according to JIS C 9612 standard. During actual operation, sound pressure level will be higher as a result of room specification condition.

# Specifications

## R32 Non-Inverter Floor Standing Specification

| Model                    | Indoor unit                         |           | FVC85A       |                  | FVC100A          | FVC125A          | FVC140A        |    |
|--------------------------|-------------------------------------|-----------|--------------|------------------|------------------|------------------|----------------|----|
|                          | Outdoor unit                        |           | RC85A (1 ph) | RC85A (3 ph)     | RC100A           | RC125A           | RC140A         |    |
| Operating Limit          |                                     | C         | 19~46        | 19~46            | 19~46            | 19~46            | 19~46          |    |
| Cooling Capacity         |                                     | Btu/h     | 29000        | 29000            | 36000            | 42000            | 48000          |    |
|                          |                                     | kW        | 8.50         | 8.50             | 10.55            | 12.31            | 14.07          |    |
| EER                      |                                     | W/W       | 3.10         | 3.10             | 3.10             | 3.33             | 3.43           |    |
| Total Power Input        |                                     | W         | 2740         | 2740             | 3400             | 3700             | 4100           |    |
| Total Current            |                                     | A         | 12.1         | 4.59             | 6.24             | 6.88             | 7.47           |    |
| Power supply             |                                     | V/Ph/Hz   | 220-240/1/50 | 380-415/3/50     |                  |                  |                |    |
|                          | Power from Outdoor                  |           |              |                  |                  |                  |                |    |
| Indoor                   | Airflow (H/M/L)                     | CFM       | 675/625/530  | 675/625/530      | 1240/1144/1040   | 1240/1144/1040   | 1240/1144/1040 |    |
|                          | External Static Pressure (Std/High) | Pa        | -            | -                | -                | -                | -              |    |
|                          | Sound Pressure Level (H/M/L)        | dB(A)     | 44/42/39     | 44/42/39         | 54/52/50         |                  |                |    |
|                          | Unit Dimension (H x W x D)          | Unit      | mm           | 1850 X 600 X 270 | 1850 X 600 X 270 | 1850 X 600 X 350 |                |    |
|                          |                                     | Packaging | mm           | 1998 X 760 X 418 | 1998 X 760 X 418 | 1998 X 760 X 498 |                |    |
|                          | Machine Weight                      | Unit      | kg           | 42               | 42               | 45               | 45             | 48 |
| Outdoor                  | Sound Pressure Level                | dB(A)     | 53           | 53               | 55               | 58               | 60             |    |
|                          | Dimension (H x W x D)               | Unit      | mm           | 695 X 930 X 350  | 695 X 930 X 350  | 852 X 1030 X 400 |                |    |
|                          |                                     | Packaging | mm           | 760 X 1084 X 473 | 760 X 1084 X 473 | 995 X 1136 X 516 |                |    |
|                          | Machine Weight                      | kg        | 56           | 57               | 64               | 79               | 84             |    |
| Pipe Connection          | Liquid                              | mm        | 9.5          | 9.5              | 9.5              | 9.5              | 9.5            |    |
|                          | Gas                                 | mm        | 15.9         | 15.9             | 15.9             | 15.9             | 15.9           |    |
| Maximum Piping Length    | m                                   | 50        | 50           | 50               | 50               | 50               |                |    |
| Maximum Piping Elevation | m                                   | 30        | 30           | 30               | 30               | 30               |                |    |
| Heat Insulation          | Both Liquid and Gas Piping          |           |              |                  |                  |                  |                |    |

Remarks:  
 1. Due to product innovation, all specifications are subjected to change by the manufacturer without prior notice.  
 2. All units are being tested and comply to ISO5151.  
 3. Nominal cooling capacity are based on the conditions: 27°C DB / 19°C WB indoor and 35°C DB outdoor.  
 4. Sound pressure levels are measured in anechoic chamber according to JIS C 9612 standard. During actual operation, sound pressure level will be higher as a result of room specification condition.